

# HARMSCO®

## WaterBetter® Polyester Series Cartridges

*Residential / Commercial*

### Designed for HIF, BC and FSSS Filter Housings

Highly efficient and economical filter cartridges made of pleated Polyester-Plus™ filter media.

- Lower overall operating cost
  - Longer filter runs for fewer change outs
  - Lower initial pressure drops
  - Reduced maintenance down time and cost
  - Increased contaminant removal
  - High flow capability



Certified to  
ANSI-NSF 61

### Features

- ▶ Pleated design for more surface area
- ▶ FDA approved materials - NSF 61 certified
- ▶ Engineered media for superior performance
- ▶ Cleanable and reusable in most applications and micron sizes
- ▶ Thermally bonded end caps to ensure better sealing
- ▶ Color coded end caps for easy micron identification
- ▶ Full product line - largest selection of micron ratings



### Applications

- ▶ Reverse Osmosis Pre-filtration
- ▶ Municipal Drinking Water Filtration
- ▶ Commercial/Residential Drinking Water Filtration
- ▶ Desalination Pre-filtration
- ▶ Industrial Water Filtration
- ▶ Cooling Tower Filtration
- ▶ Chill Water Loop Filtration
- ▶ Food & Beverage Filtration
- ▶ Marine/Aquatic Filtration



**HARMSCO® Filtration Products**



Made in USA

# WaterBetter® Polyester Series Cartridges

## Specifications

- ▶ **Filter media:** Polyester-Plus™
- ▶ **Temperature:** 140°F (standard cartridges)
- ▶ **Dimensions:** 2-3/4" O.D.; 1-1/16" I.D.
- ▶ **Center cores:** Molded ABS or rigid PVC
- ▶ **pH:** 3 to 11
- ▶ **Flow rate:** 3-5 GPM
- ▶ **End caps:** Plastisol (pliablePVC)
- ▶ **Surface area:** 4 sq.ft. per 9-3/4" length (approx.)



Certified to  
ANSI-NSF 61

## Cartridge Selection/Sizing Guide


2-3/4" O.D.

Note - Harmsco® HIF filter housings use odd length cartridges only.

Product Code	Nominal Micron Rating	Media (sq ft)	Recommended Flow Rate* (GPM)	Length (in)	O.D. (in)	No./Case
<b>Polyester</b> - engineered for high efficiency, low pressure drops						
WB-1W*	1	4	4	9-3/4	2-3/4	24
WB-5W*	5	4	4	9-3/4	2-3/4	24
WB-20W*	20	4	4	9-3/4	2-3/4	24
WB-50W*	50	4	4	9-3/4	2-3/4	24
WB-921-1	1	8	8	19-1/2	2-3/4	24
WB-921-5	5	8	8	19-1/2	2-3/4	24
WB-921-20	20	8	8	19-1/2	2-3/4	24
WB-921-50	50	8	8	19-1/2	2-3/4	24
WB-20-1W*	1	8	8	20	2-3/4	24
WB-20-5W*	5	8	8	20	2-3/4	24
WB-20-20W*	20	8	8	20	2-3/4	24
WB-20-50W*	50	8	8	20	2-3/4	24
WB-931-1	1	12	12	29-1/4	2-3/4	24
WB-931-5	5	12	12	29-1/4	2-3/4	24
WB-931-20	20	12	12	29-1/4	2-3/4	24
WB-931-50	50	12	12	29-1/4	2-3/4	24

\* "W" indicates wrapped.

### Low Pressure Drop With Harmsco® Cartridges

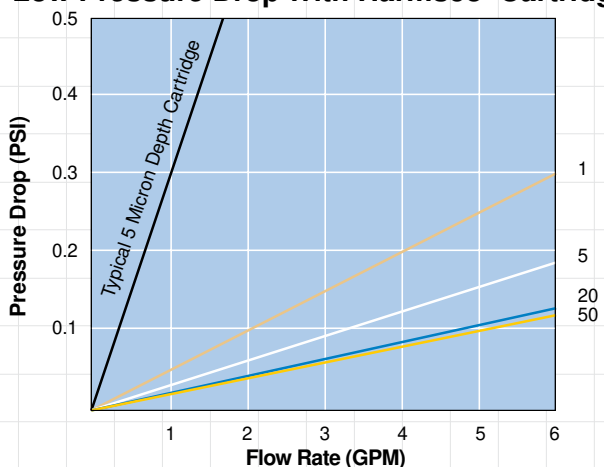

Four micron ratings and color coded end caps for easy identification.



Graph colors (left) correspond with color codes (above) used to identify nominal micron rating of cartridge.

Pressure drops are exceptionally low with WaterBetter® Series cartridges due to high surface area and Polyester-Plus™ engineered media. The data shown (left) is per new 9-3/4" cartridge in clean water.

**Note:** This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. **Limited Warranty:** Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.



**HARMSCO® Filtration Products**

P.O. Box 14066, North Palm Beach, FL 33408

(561) 848-9628 • Toll-free: (800) 327-3248 • Fax: (561) 845-2474 • E-mail: sales@harmsco.com

[www.harmsco.com](http://www.harmsco.com)



Made in USA

© Harmsco, Inc. 24A 2/11