



## 50 Series Tsunami™ Filtration

Water Separator / Oil Coalescing Filter / Activated Carbon Filter

**Filter particulates from air systems with a capacity of up to 50 CFM**

- **30 Day Money Back Performance Guarantee!**
- Guaranteed point-of-use protection for air tools and pneumatic equipment
- Removes large amounts of moisture
- Unique up-flow separation takes place as air reverses direction 180° and passes through special stainless steel mesh element
- Integral float drain ejects water and oil from large drain sump
- OEM Choice for Product Protection

Exceeding recommended flow of 50 SCFM may result in moisture carryover.



Water Separator

- The Tsunami Water Separator removes water, up to 1 quart per minute, and filters particulate down to 10 micron



2-Stage Filtration - 50 CFM

- Standard spray package with water separator, oil coalescing filter and regulator



3-Stage Filtration - 50 CFM

- Standard spray package with water separator, oil coalescing filter, and activated carbon with built-in regulator
- Absorbs oil vapors from air systems
- OSHA Grade "D" Air

Part #	Description	Flow Rating	Port Size	Length	Width	Max Pressure	Max. Temp.	Weight
21999-0131	Tsunami™ Water Separator - removes water and oil to 10 micron	50 SCFM	1/2" NPT	14-1/4"	2-3/8"	250 PSI	200° F	3.25 lbs
21999-0390-Z	Tsunami™ Oil Coalescing Filter - removes oil and particulate to .01 micron	50 SCFM	1/2" NPT	14-1/4"	2-3/8"	250 PSI	200° F	3 lbs
21999-0131-AC	Tsunami™ Activated Carbon Filter - removes oil and oil vapor to .003ppm	50 SCFM	1/2" NPT	14-1/4"	2-3/8"	250 PSI	200° F	3 lbs
21999-0253	Tsunami™ 2-stage Filter System (separator and oil coalescing filter)	50 SCFM	1/2" NPT	18.25"	13"	250 PSI	200° F	12 lbs
21999-0257	Tsunami™ 3-stage Filter System (separator / oil coalescing / activated carbon)	50 SCFM	1/2" NPT	18.25"	13"	250 PSI	200° F	14 lbs
9000801	Float Drain Replacement							



www.tsunami.us.com | 800-782-5752 | info@gosuburban.com



# Dynamic Technology Vs. Old Technology

## Tsunami™ Water Separator

- Dynamic technology
- **30 Day Money Back Performance Guarantee**
- Flow rated under heavy wet conditions

### Heads:

- Machined from 6061 aircraft aluminum, anodized. **maximum corrosion protection**

### Water Separation:

- Air flows thru center air channel tube to the bottom of Tsunami
- It hits the baffle plate depositing the liquid and particulate in the large drain sump
- **The air is then redirected 180° and flows up thru the oversized Stainless Steel mesh element**
- **Any remaining water droplets and aerosols to 10 micron are forced to the outside and will run down to the drain sump.**
- **Up-flow gravity separation**
- **Performance is 100% consistent at all flows**

### Barrel:


- **Oversize length and diameter**
- Machined from 6061 aircraft aluminum
- **Mil Spec anodized inside and out for corrosion**
- **Large drain sump**
- **Can handle large surges of water**

### Bottom Cap:

- **Mil Spec anodized for corrosion**
- **Elevated sump for sediment to accumulate (extended drain life)**
- **Easy to remove to service float drain**

### Float Drain Standard:

- Easy to service
- Easy to install; low maintenance

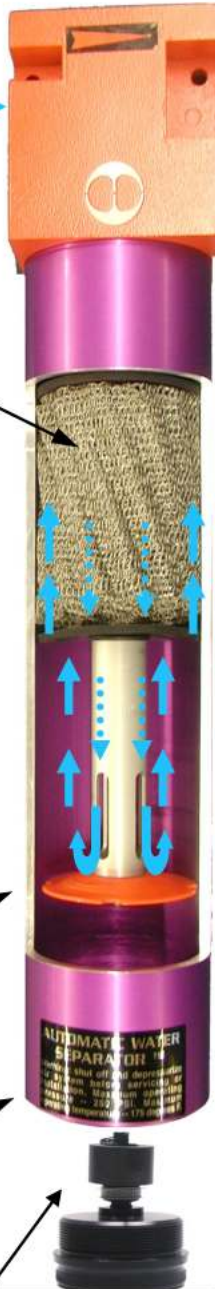

## Standard Filter

- Competition does not offer guaranteed product performance
- 1940's technology
- Most Filters are flow rated dry in a laboratory

### Heads:

- Made of die cast aluminum
- Interior not coated, **causes corrosion.**

### Water Separation:

- Water separation is created by centrifugal motion (spinning the air)
- Does not work well with intermittent or low flows, **moisture carries over**
- Need high continuous flow for best performance.
- Short separation distance between air inlet and filter element, **moisture carries over**
- **Shortened element life**

### Elements:

- Very small
- **Plug Easily**
- **High pressure drop**
- **Frequent replacement required**

### Plastic Bowls:

- **Requires metal bowl guards for safety**
- **Compressor oils will cause cracking**
- **Unable to support electric solenoid drain**
- **Unable to handle large surges of water**

### Aluminum Die Cast Bowls:

- **Internal corrosion**

### Drains:

- Manual drains are standard on most filters
- Float drains are optional
- **Location of float drains in one piece filter bowls cause premature drain failure**
- **Difficult replacement**

